


Note: Refer to the XRT2.1K Owner's Manual page 10 for additional connection information.

Connection Legend:

- Audio Signal Cable - —
 - Loudspeaker Cable - —
 - Power Control Cable* - —
 - AC Power Cords - —
- * 2 conductor shielded with 1/8 inch stereo mini phone plug on each end.

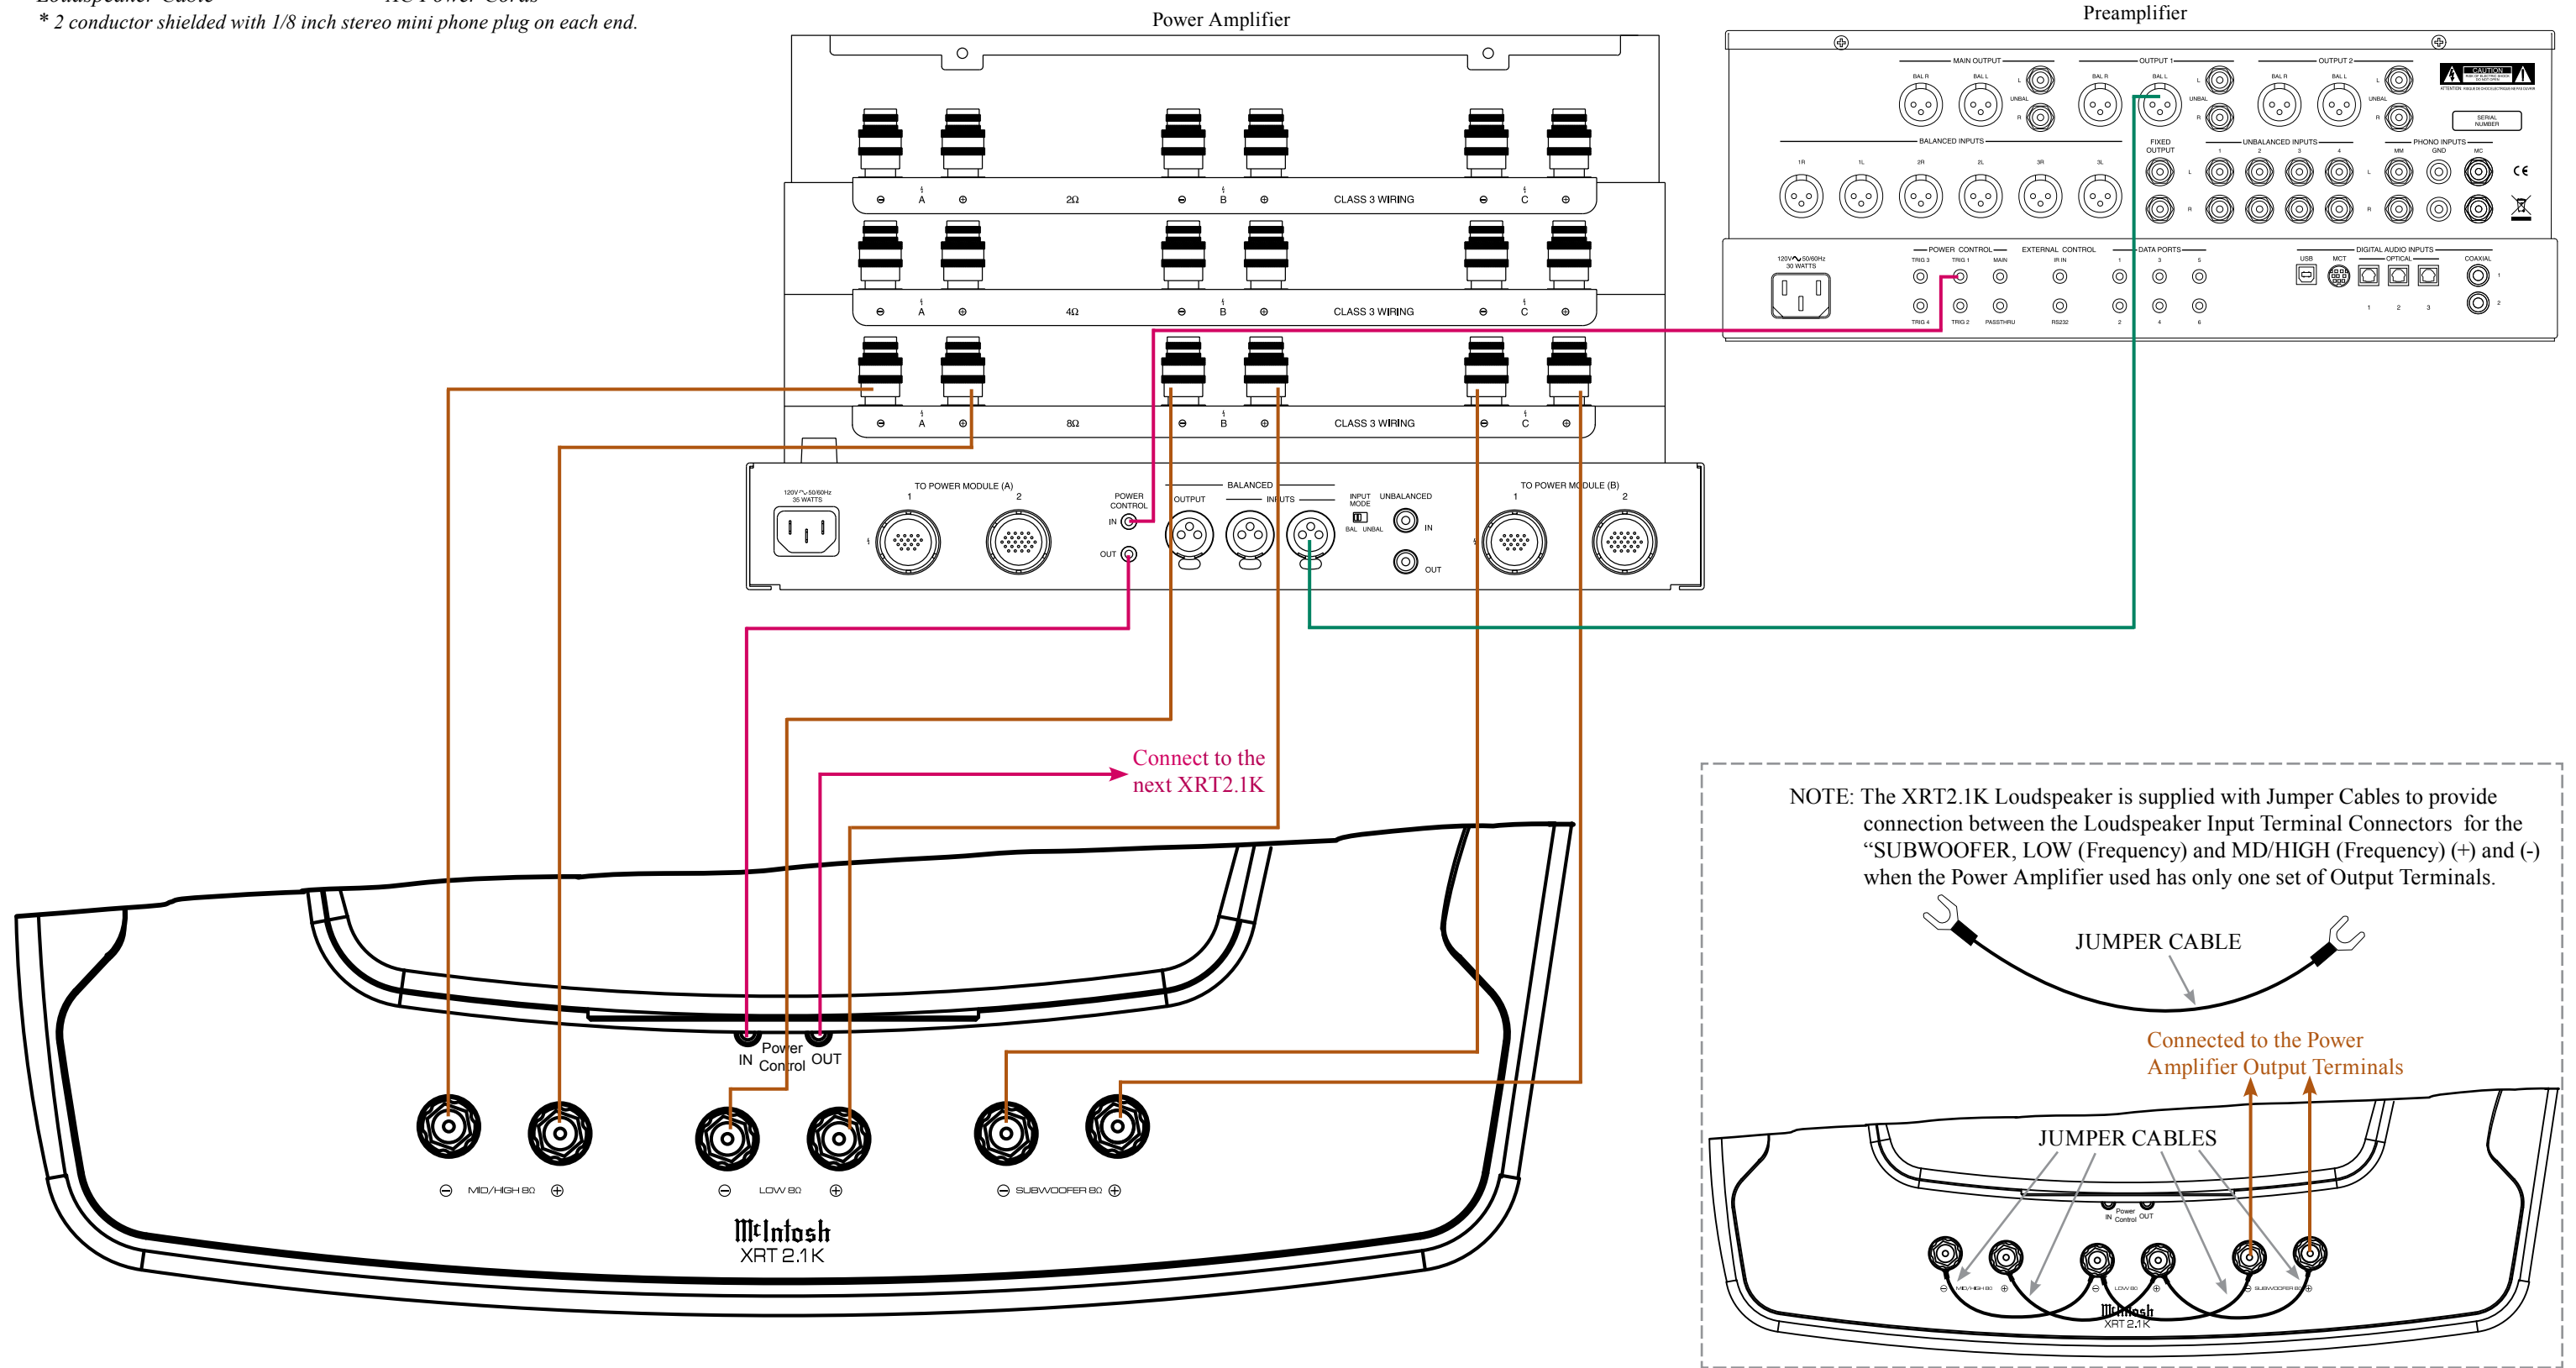

NOTE: The XRT2.1K Loudspeaker is supplied with Jumper Cables to provide connection between the Loudspeaker Input Terminal Connectors for the "SUBWOOFER, LOW (Frequency) and MD/HIGH (Frequency) (+) and (-) when the Power Amplifier used has only one set of Output Terminals.

JUMPER CABLE


Connected to the Power Amplifier Output Terminals

JUMPER CABLES



Note: Refer to the XRT2.1K Owner's Manual page 12 for additional connection information.

Connection Legend:

- Audio Signal Cable - —
 - Loudspeaker Cable - —
 - Power Control Cable* - —
 - AC Power Cords - —
- * 2 conductor shielded with 1/8 inch stereo mini phone plug on each end.

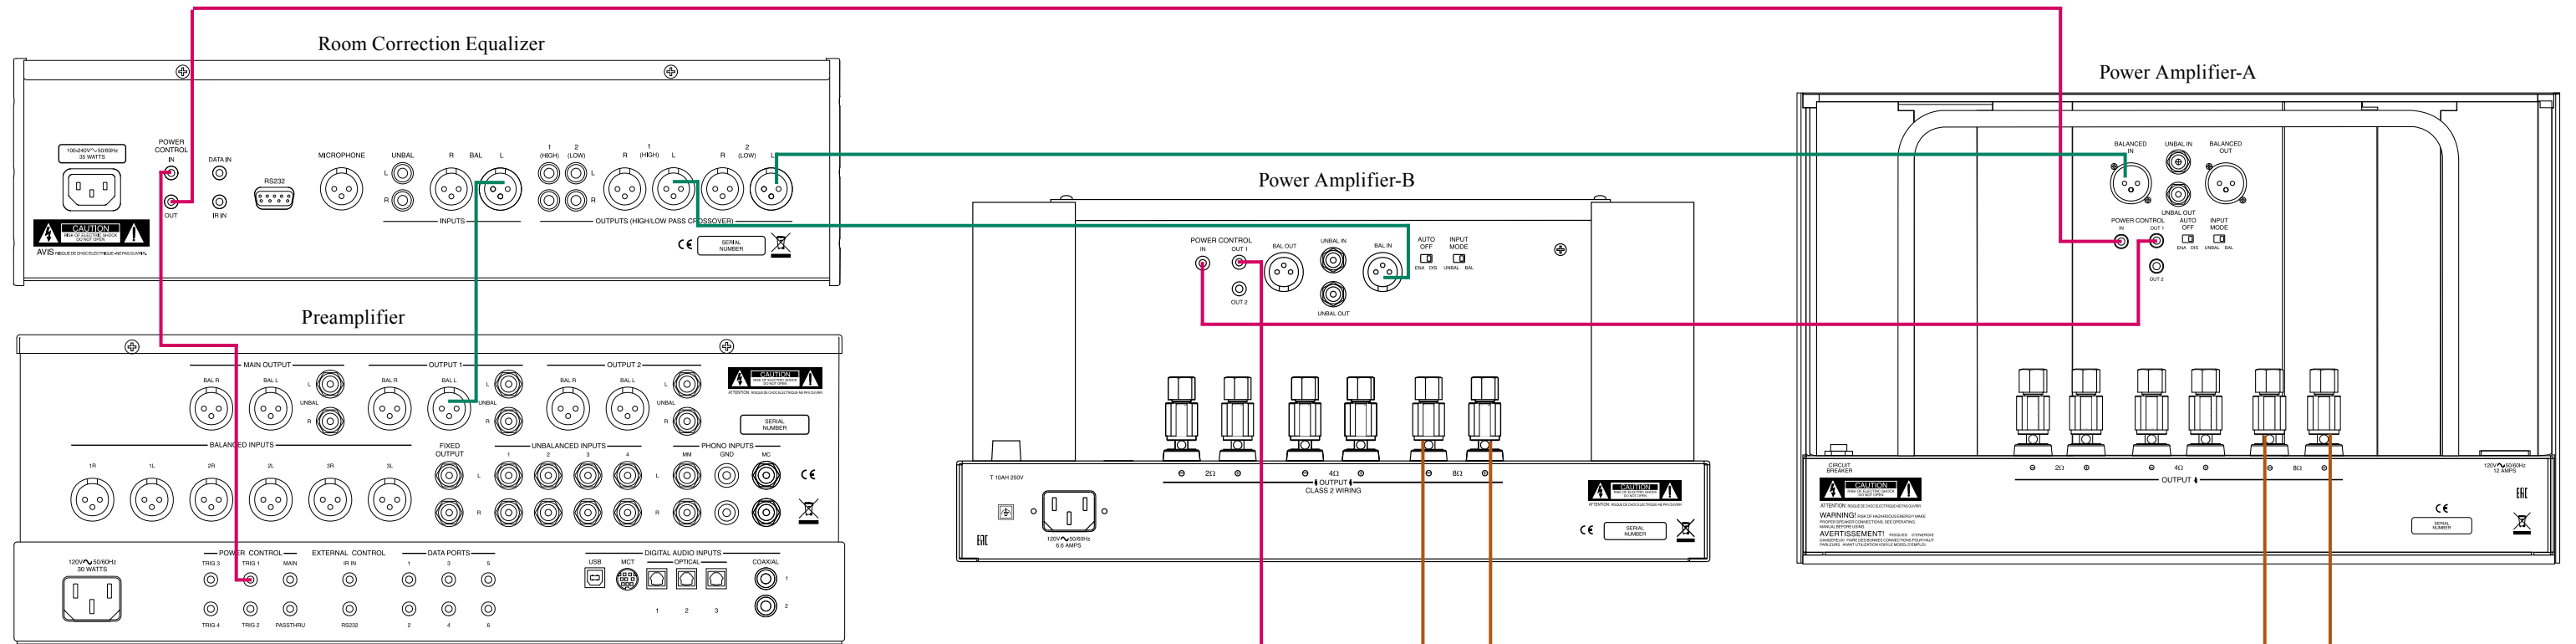

NOTE: The XRT2.1K Loudspeaker is supplied with Jumper Cables to provide connection between the Loudspeaker Input Terminal Connectors for the "SUBWOOFER and LOW (Frequency) (+) and (-) when the Power Amplifier used has only one set of Output Terminals.

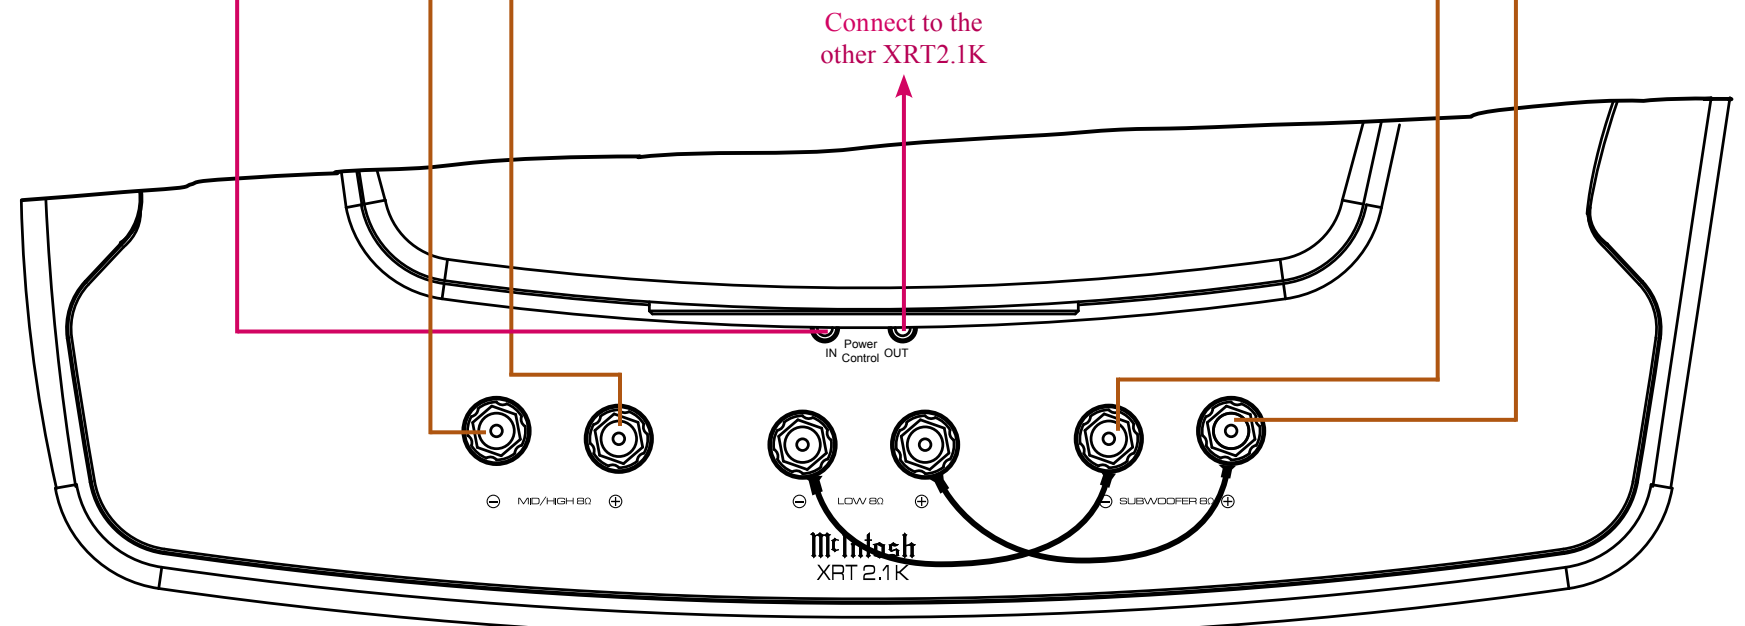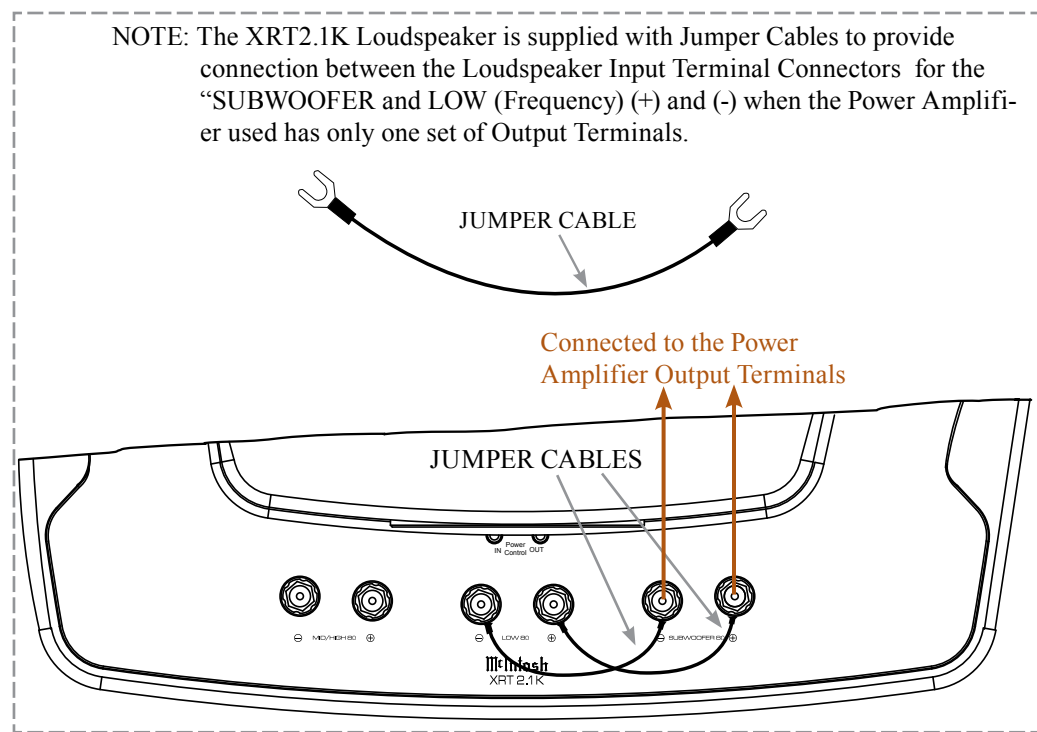

Note: Refer to the XRT2.1K Owner's Manual page 14 for additional connection information.

Connection Legend:

- Audio Signal Cable - —
 - Loudspeaker Cable - —
 - Power Control Cable* - —
 - AC Power Cords - —
- * 2 conductor shielded with 1/8 inch stereo mini phone plug on each end.

